


GALVANIZED SUPPORT PIPE SPECIFICATIONS:

- 1. OUTSIDE DIAMETER (O.D.): 1.050 in (\pm 0.005 in) OR 26.90 mm (+ 0.30 mm)
- 2. WALL THICKNESS: 17 GAUGE OR 1.37 mm
- 3. ASTM - A513 OR EQUIVALENT STANDARD
- 4. SWAGE ELEMENT COAXIAL OR CONCENTRIC TO THE REMAINDER OF THE PIPE
- 5. BOW TOLERANCE: 031 in OR 0.80 mm PER 3 FEET OR 1 METER SECTION
- 6. G60 COATING OR BETTER
- 7. ENDS DEBURRED AND PAINTED WITH A POLYESTER-BASED POLYMER CONTAINING ZINC OXIDE

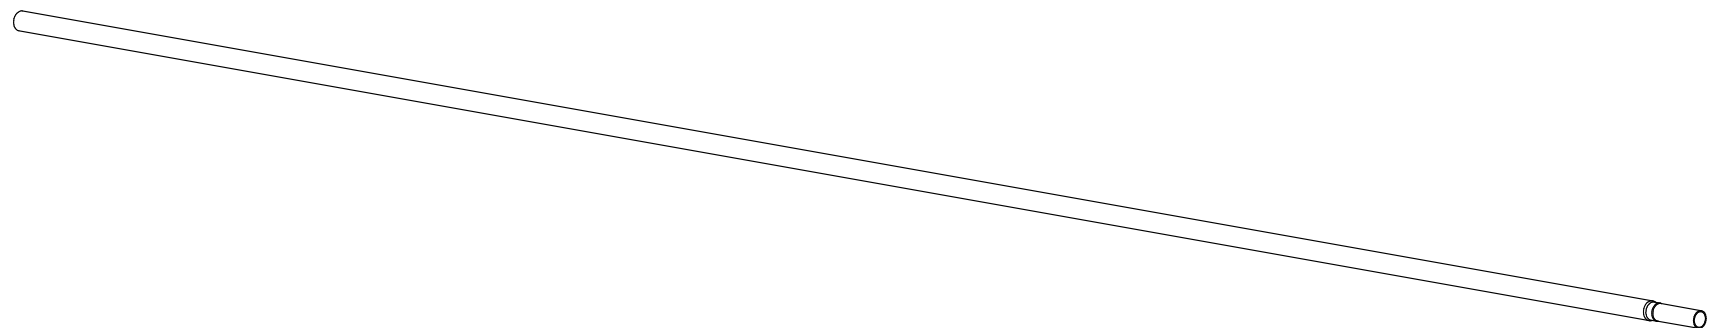

SUPPORT PIPE: GALVANIZED 1.050" X 10 FT	
DATE: 09-05-23	REVISION:

PART NR.:
4175