


The Poultry Watering Specialists



Installation Manual: Slope Neutralizer Floor Application

Superior performance, exceptional durability and easy management.

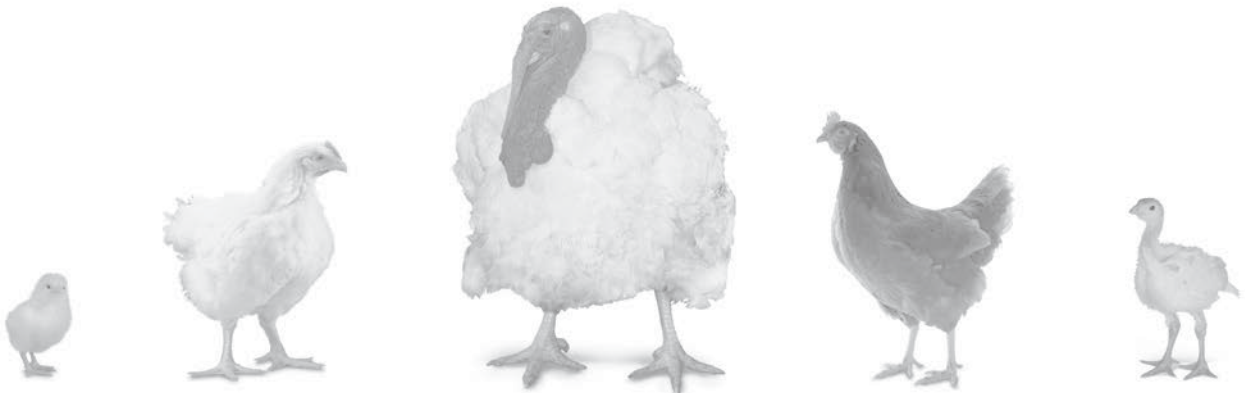

**ZIGGITY SYSTEMS, INC.
STANDARD WARRANTY**

Ziggity Systems, Inc. ("Ziggity") warrants to the original retail purchaser ("Purchaser") of any Ziggity product ("Product") that for one (1) year from the date of original retail purchase the Product will be free from defects in materials and workmanship that are material in nature. The sole remedy available to Purchaser in the event of such a defect will be the repair or replacement (at Ziggity's sole option) of the materially defective Product, excluding labor. Purchaser will be responsible for the expense of shipping the defective Product to Ziggity and, upon Ziggity's approval of the warranty claim, Ziggity will be responsible for the expense of shipping the repaired or replaced Product to Purchaser. Any Product or Product replacement parts provided by Ziggity under this warranty are only warranted for the remainder of the warranty period for the original Product. Any Product or Product replacement part replaced by Ziggity under this warranty becomes the property of Ziggity.

This warranty excludes liability for defects in or damage to the Product (both internal and external) caused, directly or indirectly, by misuse, neglect, negligence, alteration, accident, excessive mineral or chemical contact, corrosive chemical use, minerals or sediment in the water, poor quality water, acts of nature or failure to: (A) follow Ziggity's guidelines and recommendations for the Product, (B) follow installation and operating instructions for the Product, (C) use potable and filtered water in and with the Product, or (D) properly maintain the Product. Furthermore, this warranty does not extend to any item that is manufactured by others, including without limitation items such as: galvanized support pipe, water filters, water meters, sight gauges and proportioners. These items are warranted separately by the original manufacturer, if at all.

Ziggity makes no other representations or warranties of any kind except as expressly stated in this warranty. Ziggity disclaims any and all implied warranties including the warranty of merchantability and the warranty of fitness for a particular purpose. To the fullest extent permitted by applicable law, Ziggity shall not be liable to Purchaser for any consequential, incidental, exemplary, punitive, special, or indirect damages, and Ziggity shall not be liable for any damages that are based on negligence, breach of warranty, or strict liability. Ziggity's liability under this warranty shall in no event exceed the purchase price paid by Purchaser for the defective Product. Some states do not allow exclusion or limitation of damages to the full extent described above, so the above exclusions and limitations may not apply fully to you.

Ziggity may from time to time, through its issuance of formal Information Update documents, provide for supplemental warranty coverage in addition to this standard warranty for certain products, or may provide for deviations or exclusions from this standard warranty for certain products. If any such supplemental, deviation, or exclusion Information Updates apply to your Product, you will be provided with a copy of such Information Updates at the time of your original retail purchase and the standard warranty provided for above will be deemed modified accordingly.

No person, including any dealer, distributor, agent, or other representative of Ziggity, is authorized to make any representation or warranty concerning the Product other than as specifically contained in this standard warranty and any Information Update from Ziggity providing for any supplemental warranty coverage or deviation or exclusion from warranty coverage. Ziggity reserves the right to change Product models, make changes to the Product and Product specifications, at any time and without notice or obligation to Purchaser.

**ZIGGITY SYSTEMS, INC.
EXTENDED DRINKER WARRANTY**















In addition to its standard warranty, Ziggity provides an extended warranty for certain Drinkers manufactured by Ziggity. All other provisions of the standard warranty apply to the Extended Drinker Warranty. If any covered Drinker is determined by Ziggity to be defective in materials or workmanship after the expiration of the one (1) year standard warranty period and prior to ten (10) years after the date of the original retail purchase, Ziggity will provide a replacement Drinker or Drinker components, as applicable, to the original retail purchaser at the following discount off of published list/brutto prices:

End User Purchase Date	End User Discount
0 - 36 months	100% (No charge)
37 - 60 months	65%
61 - 120 months	40%


WARNING – AVOID USE WITH OR EXPOSURE TO CORROSIVE PRODUCTS

Do not allow Ziggity products to come into contact with petroleum, phenol or aldehyde based products or any other corrosive product in general. Contact with such corrosive products is likely to result in damage to or failure of the Ziggity product. Additionally, aggressive chlorination and/or acidification programs (greater than 1 ppm and/or pH less than 6) will shorten the life of Ziggity products. Failure to follow this warning will void any otherwise applicable warranty coverage for the Ziggity product when the product is chemically damaged.


RECOMMENDED TOOLS TO COMPLETE INSTALLATION

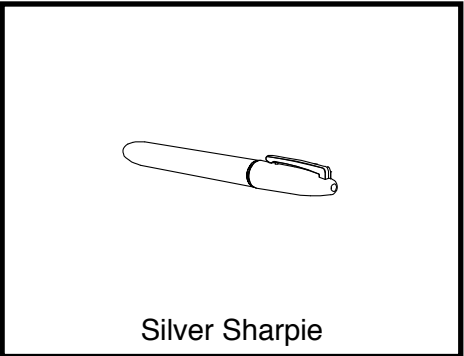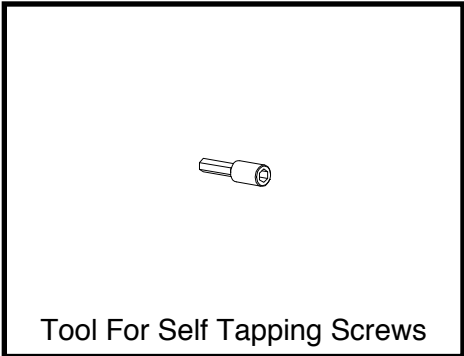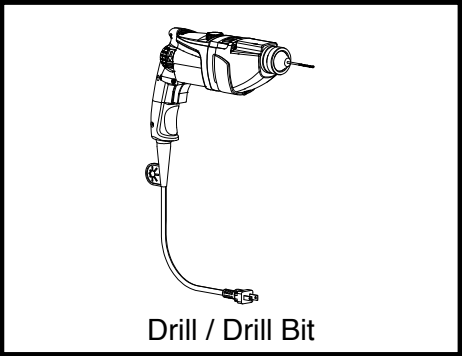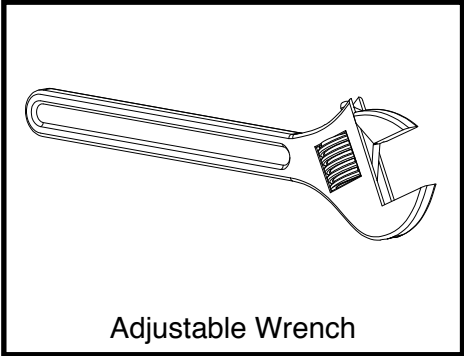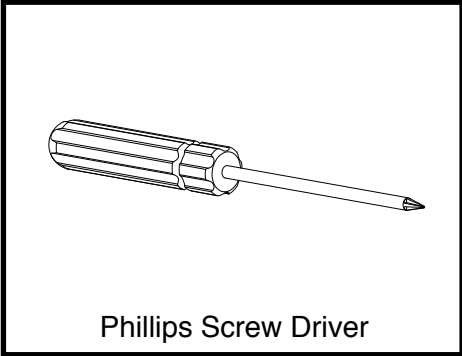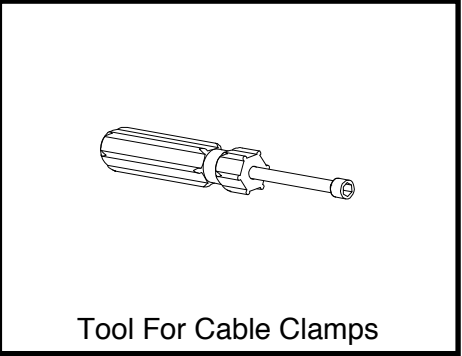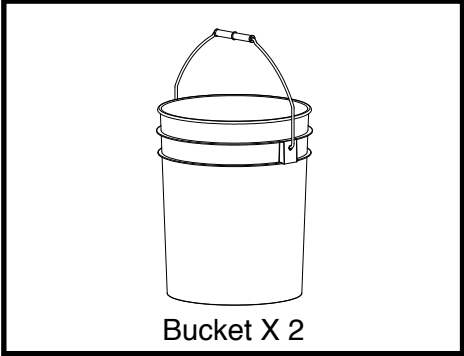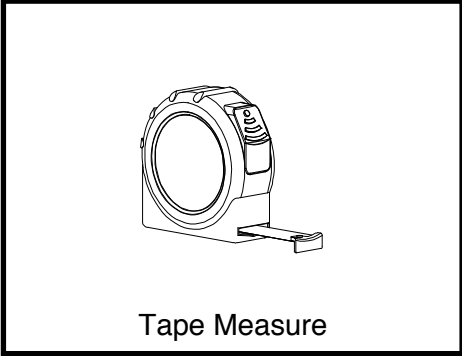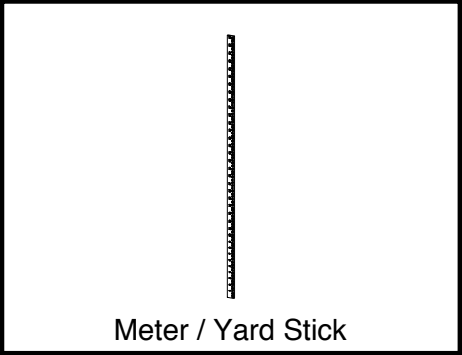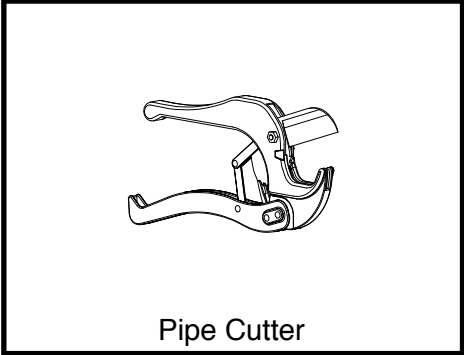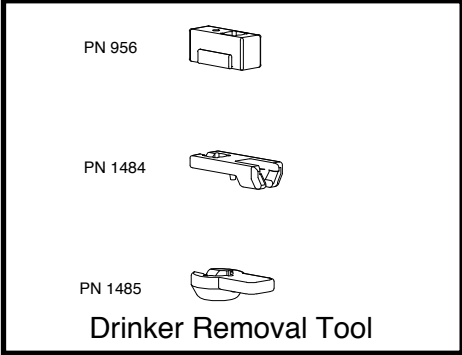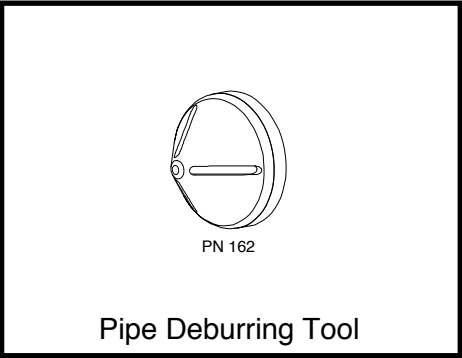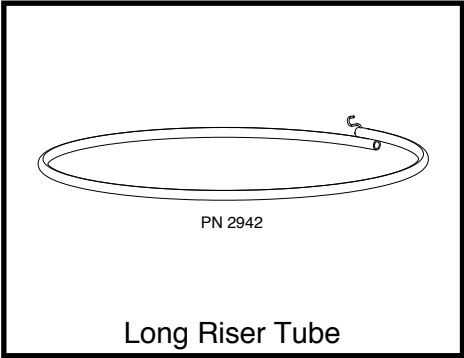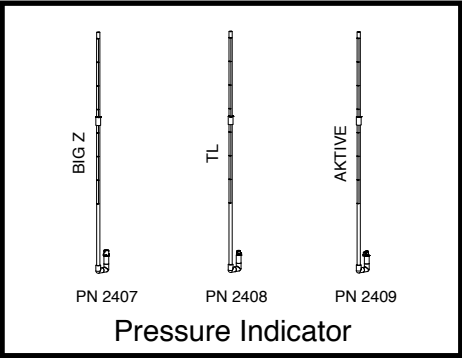

BEFORE PROCEEDING





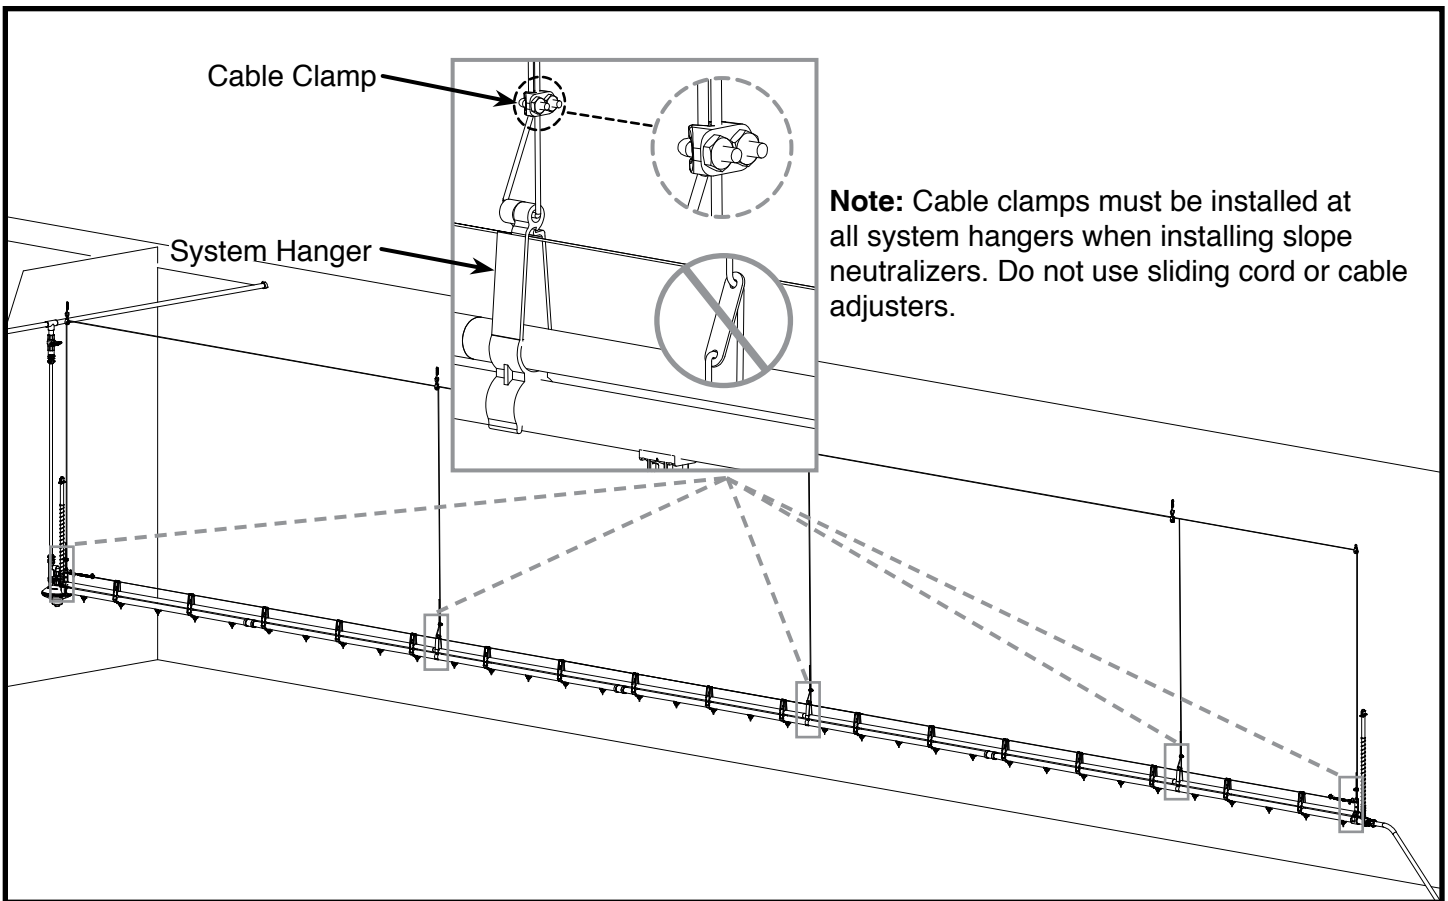


FIRST STEPS

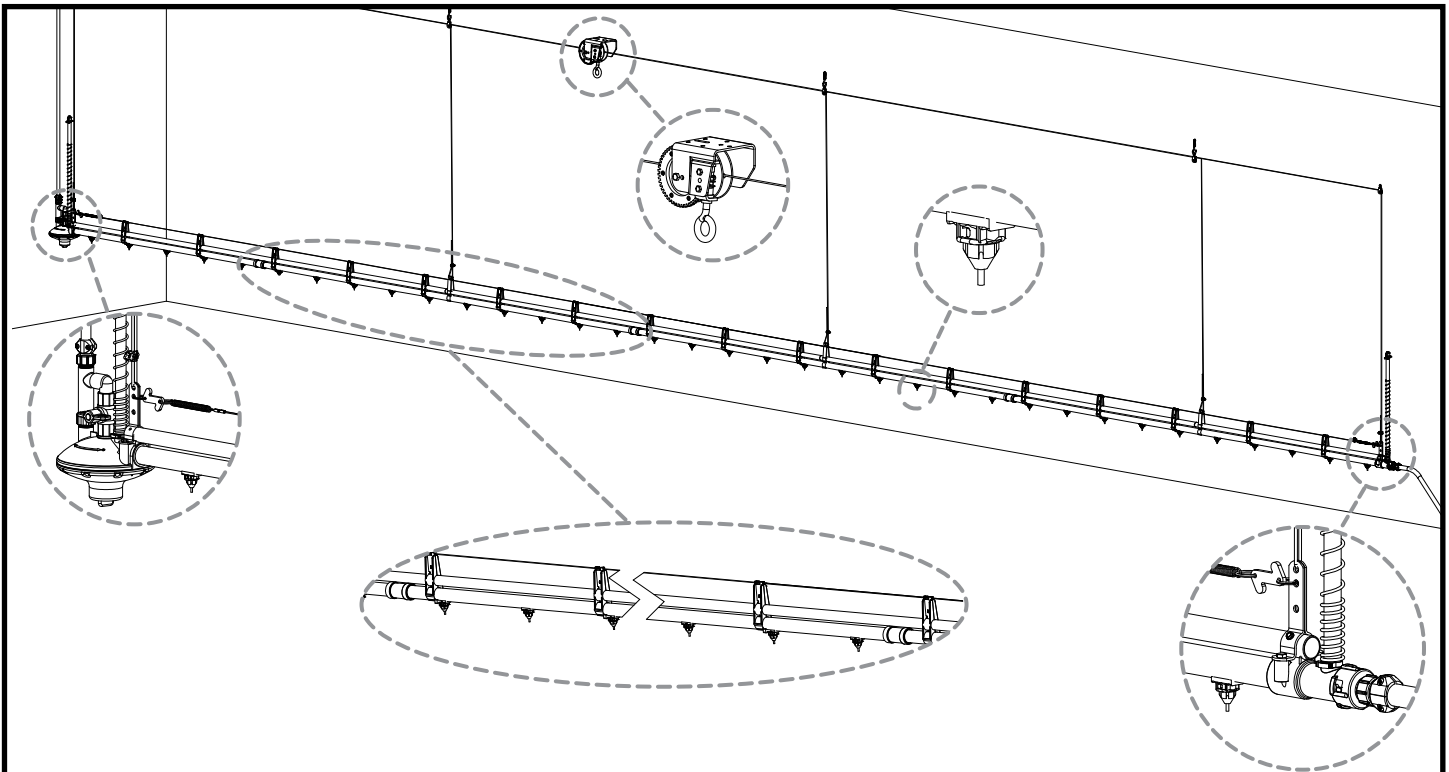

A winchable water system must be completely installed. Requires the following; regulator, pipe kits, winch, drinkers, end assembly and water supply to the regulator.

ENSURE REGULATOR IS AT HIGH END

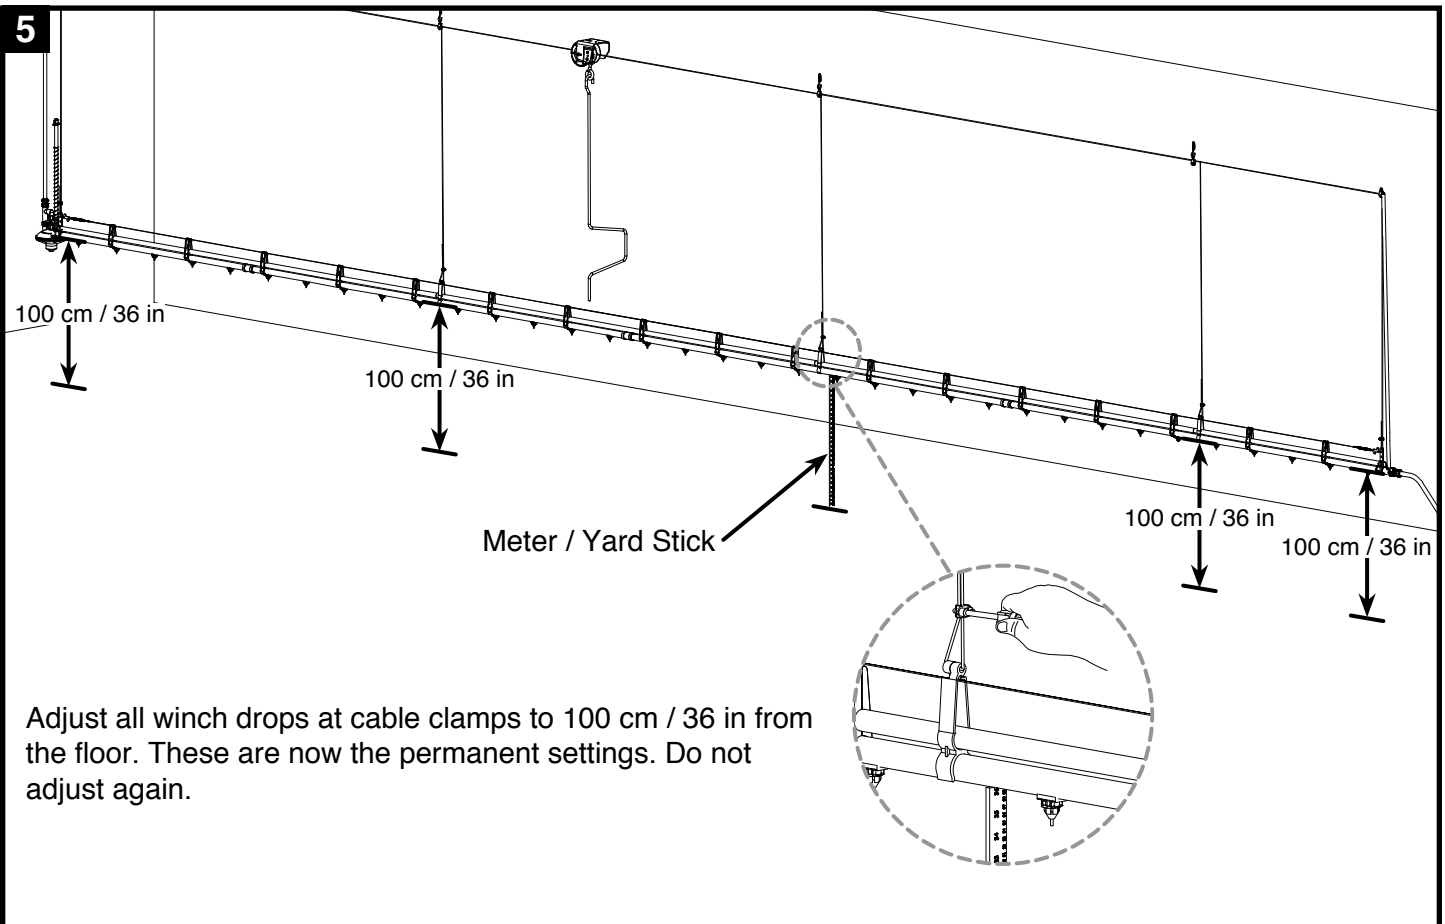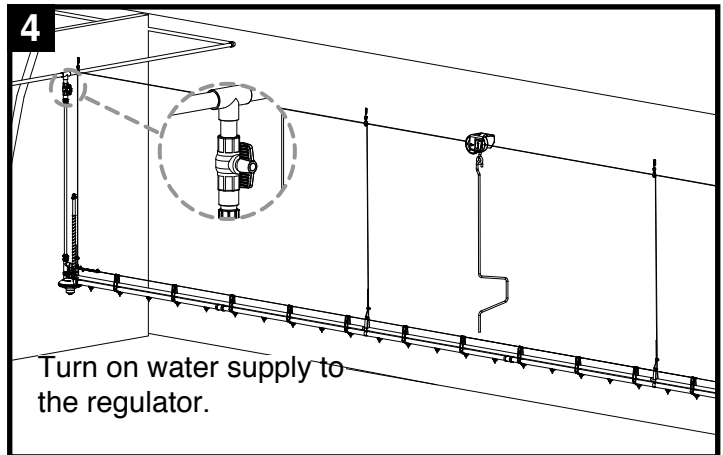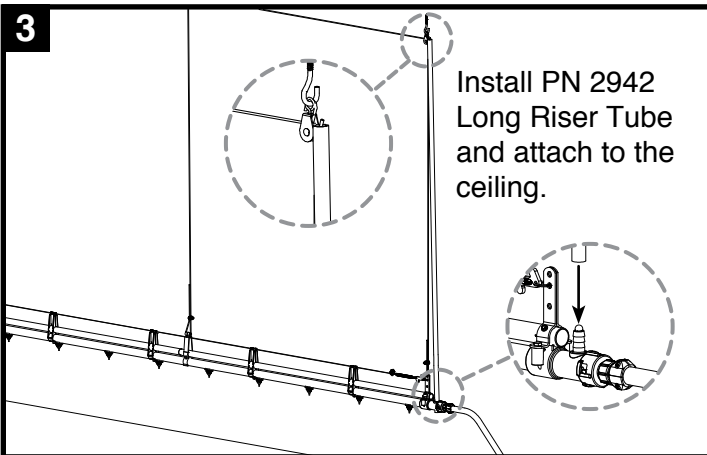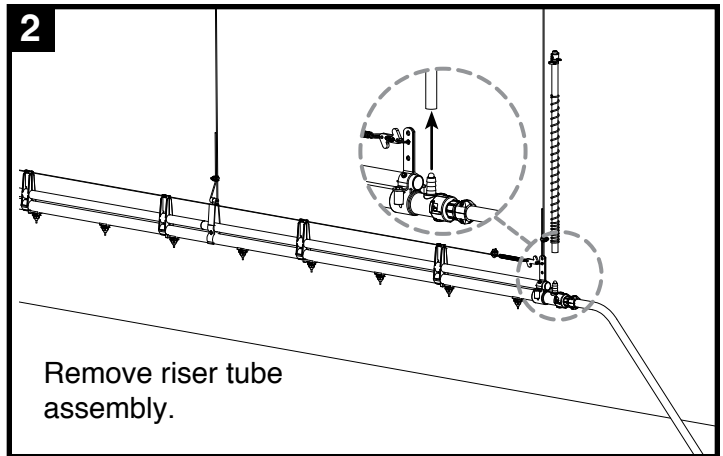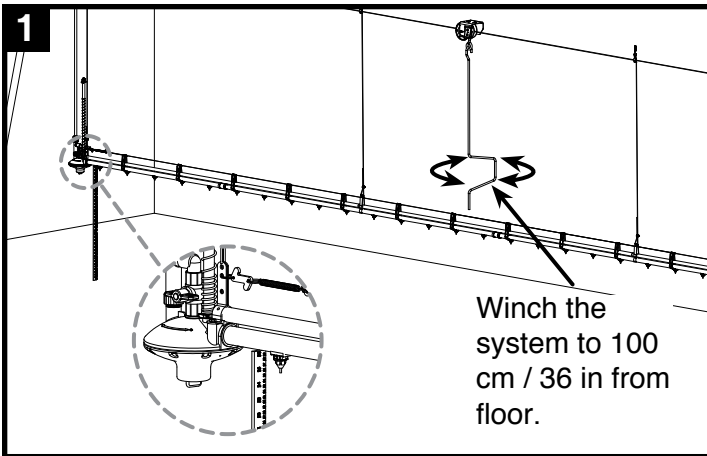

DETERMINE THE OVERALL SLOPE

1

Record the distance from floor to water level.

2

Record the Distance from floor to water level.

3

End Assembly Regulator Slope

If the slope is greater than 75 cm / 30 in, reconfigure the system.

If the slope is greater than 15 cm / 6 in and less than 75 cm / 30 in, proceed on to next step.

DETERMINE THE SLOPE NEUTRALIZER LOCATIONS

1

Use bucket to catch water.

2

Install pressure indicator.

3

Adjust the water level even with the first mark.


4

Replace pressure indicator with drinker.

DETERMINE THE SLOPE NEUTRALIZER LOCATIONS


5

Install pressure indicator at random location.

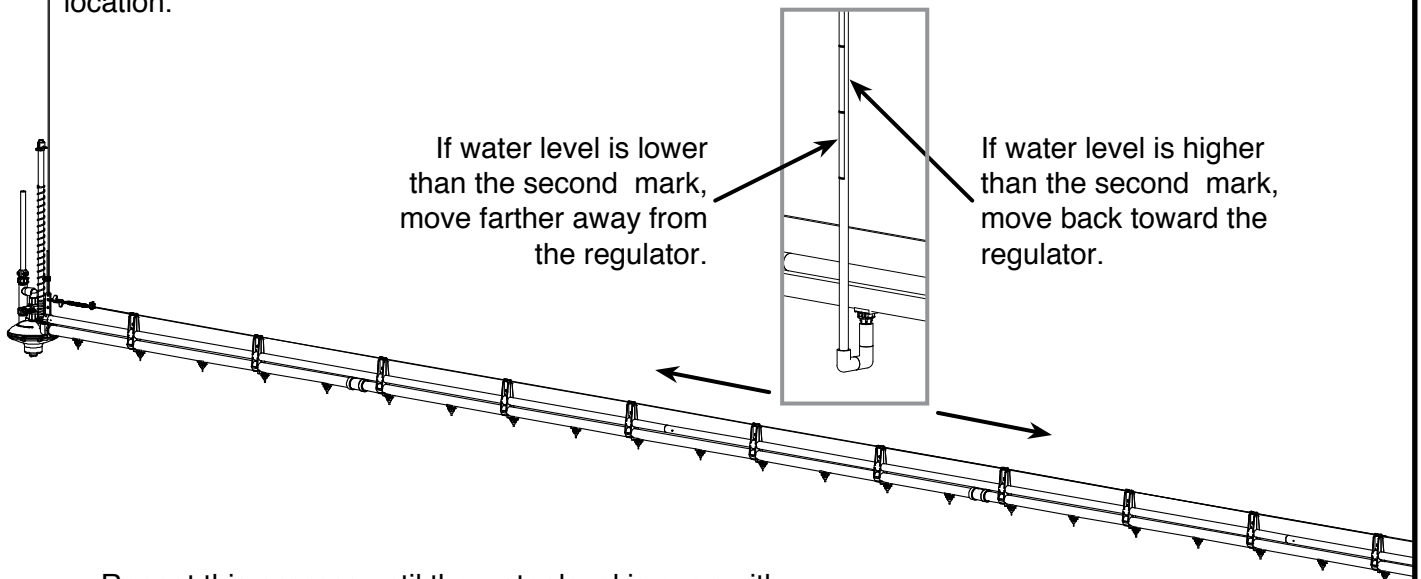


Repeat this process until the water level is even with the second mark. This is the location for the first slope neutralizer.

6

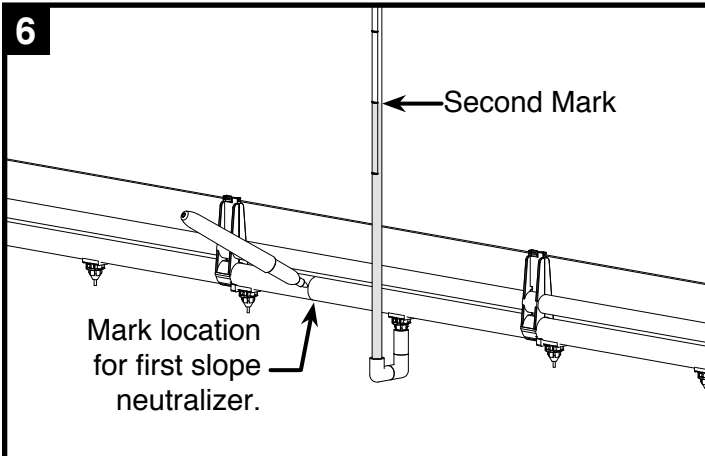


7

Repeat step 5 to find additional locations.

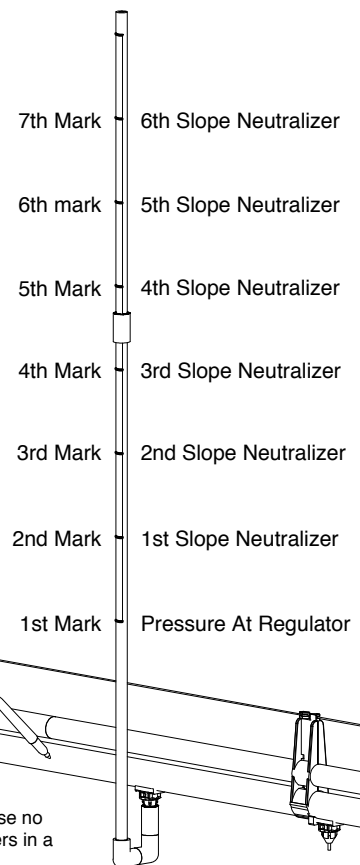








Note: It is recommended to use no more than six slope neutralizers in a single system.

8



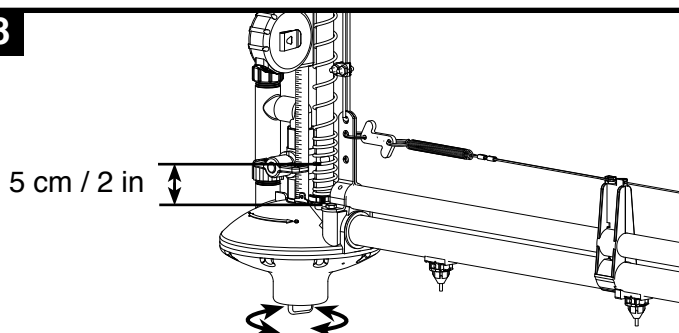


Adjust regulator to 5 cm / 2 in. Do not change this pressure setting for the remainder of the installation process.



SLOPE NEUTRALIZER INSTALLATION

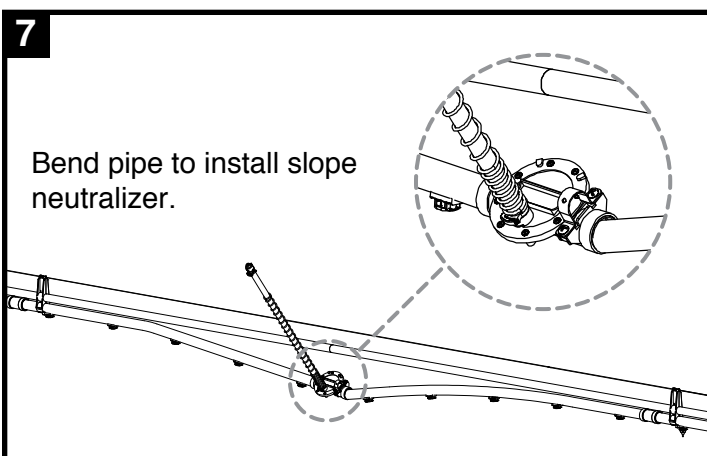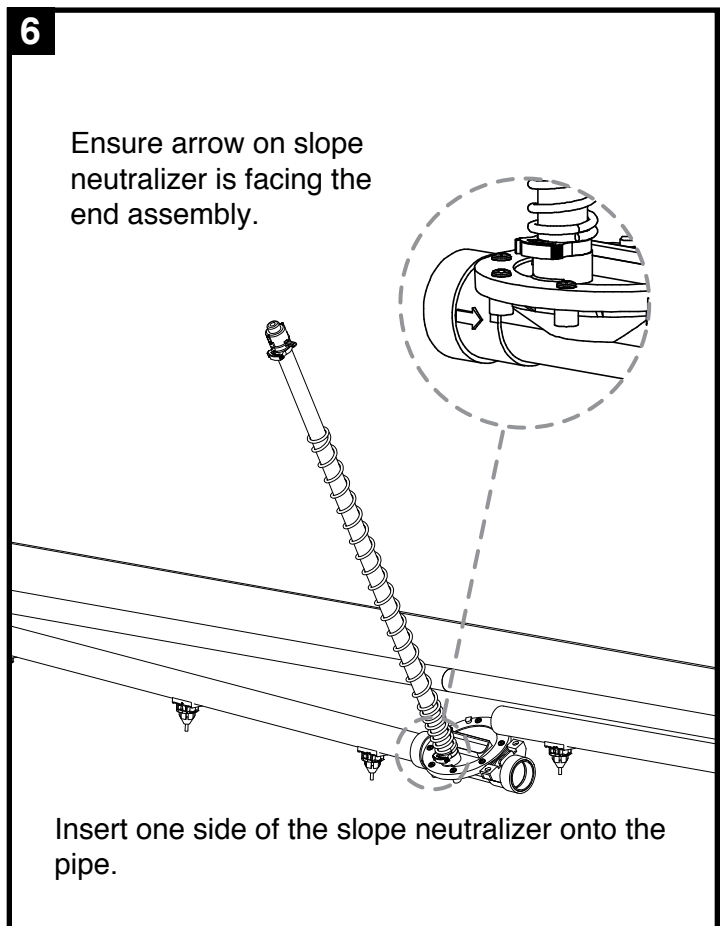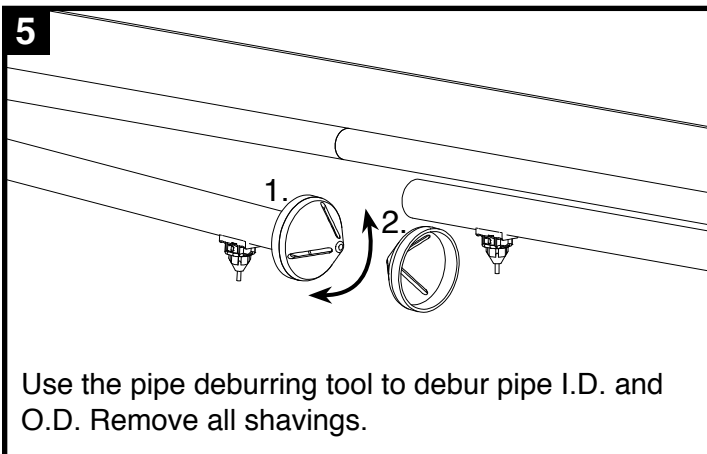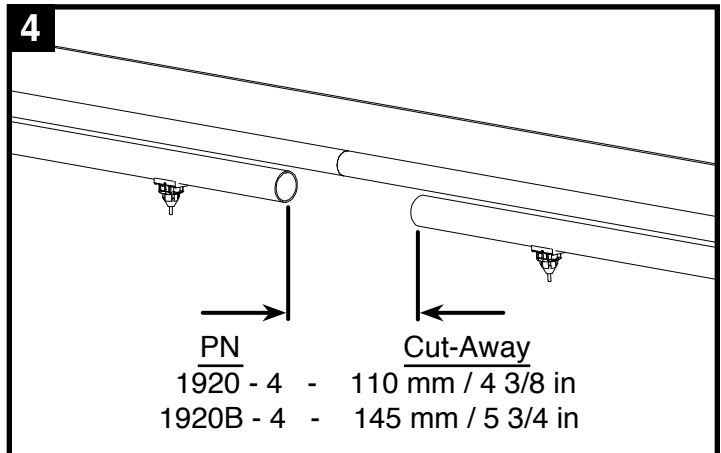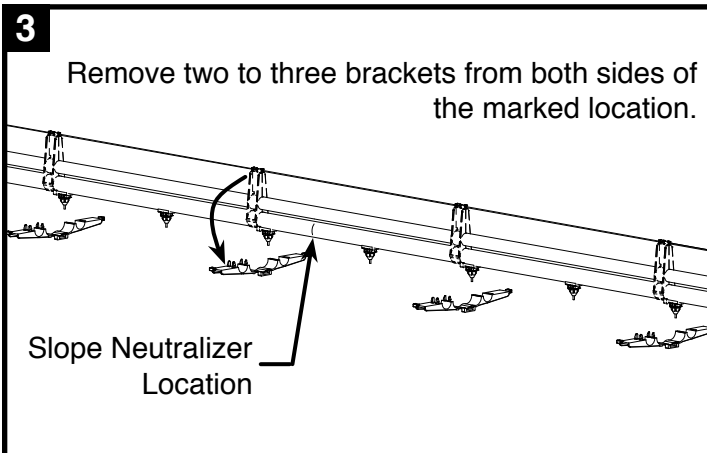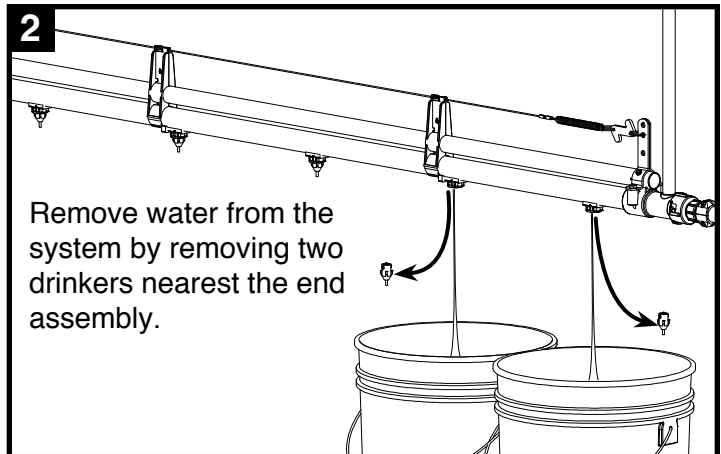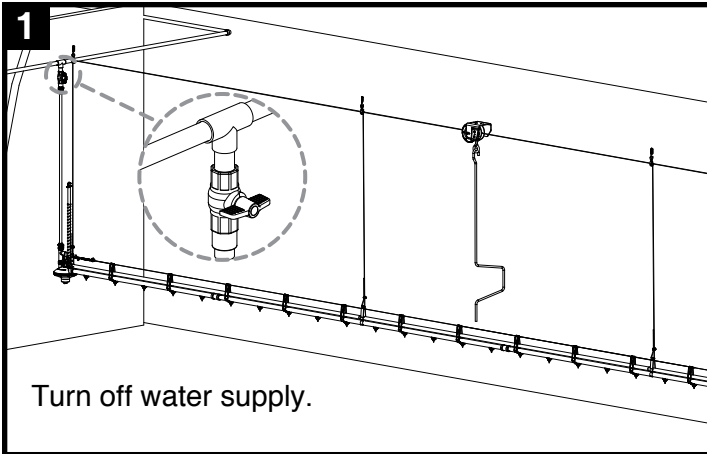



SLOPE NEUTRALIZER INSTALLATION CONTINUED

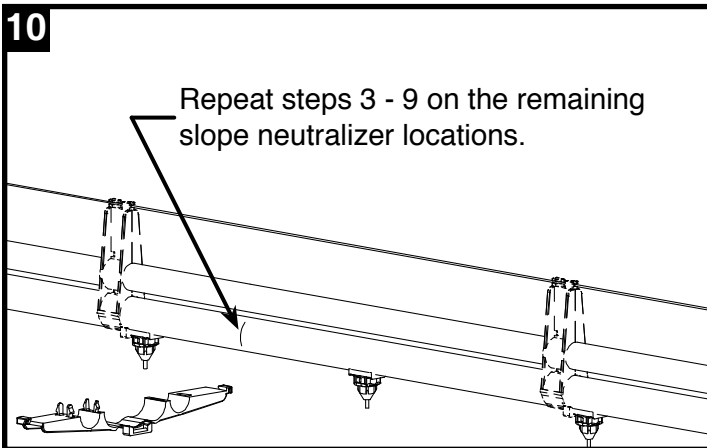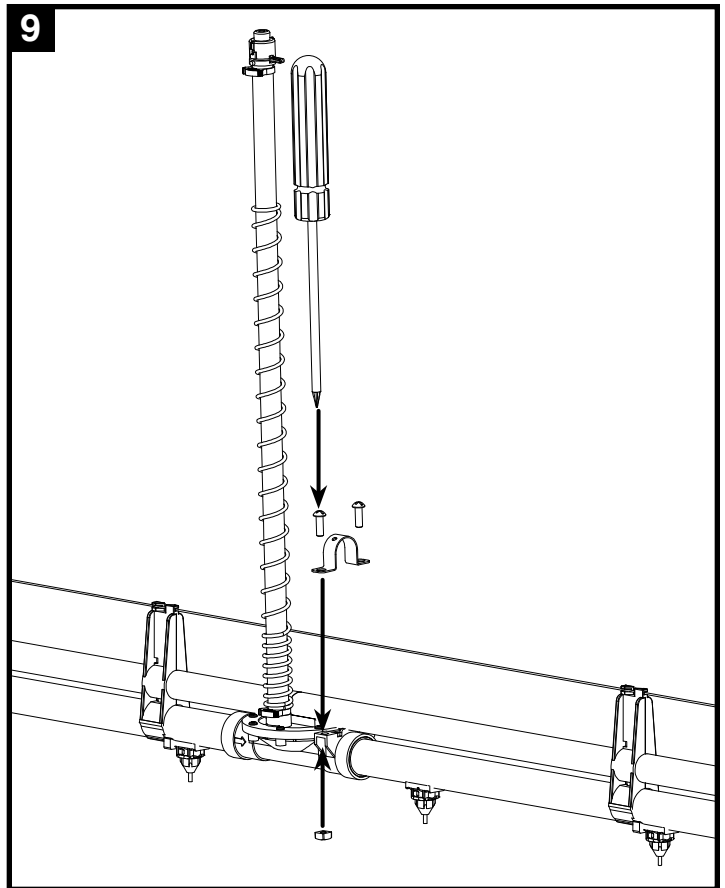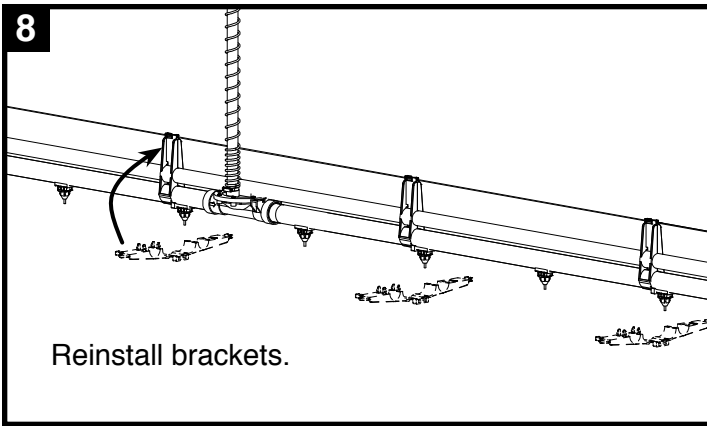

OPTIONAL STEPS FOR UNDERSIZED SUPPORT PIPE





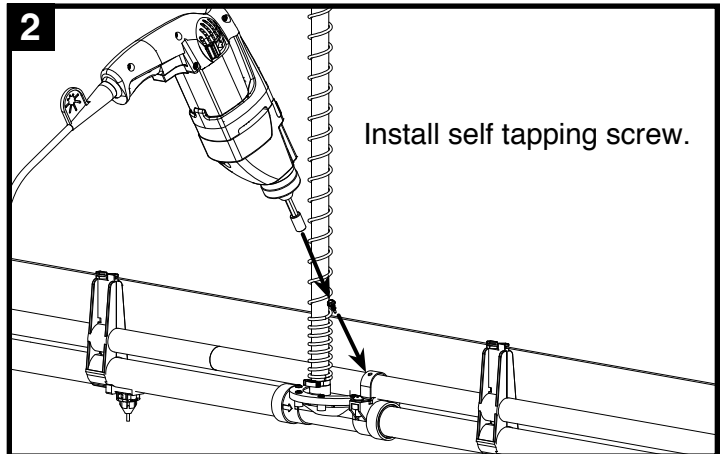
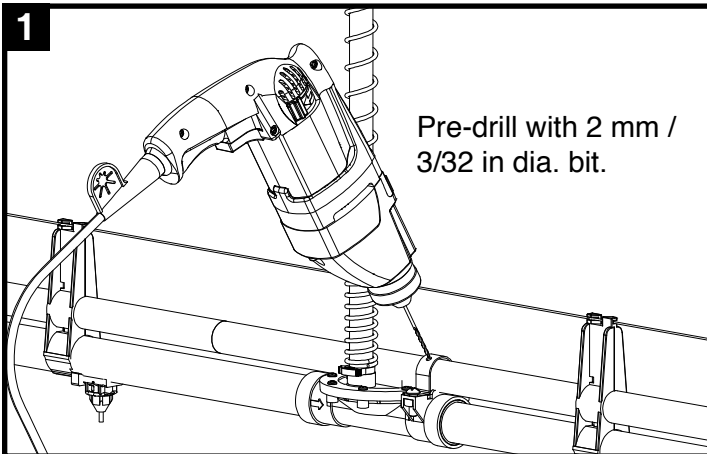


FINAL STEPS

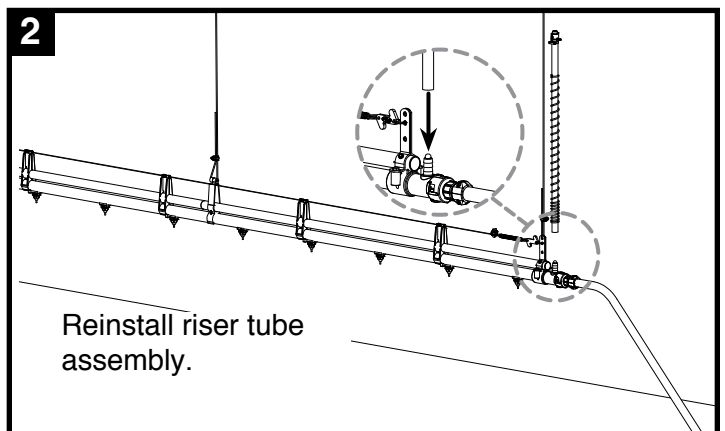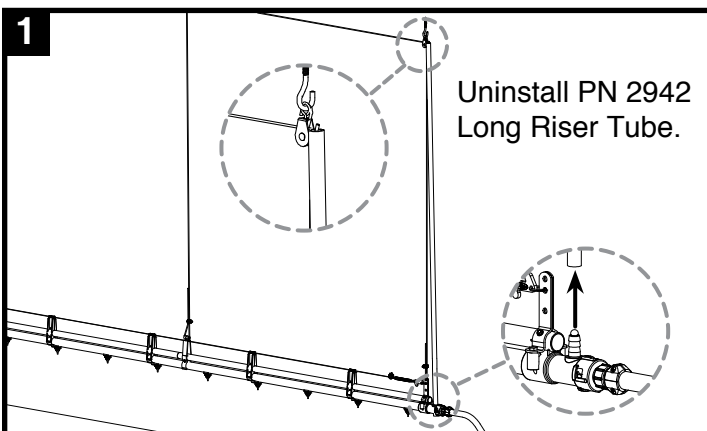








Installation Verification

INSTALLATION VERIFICATION

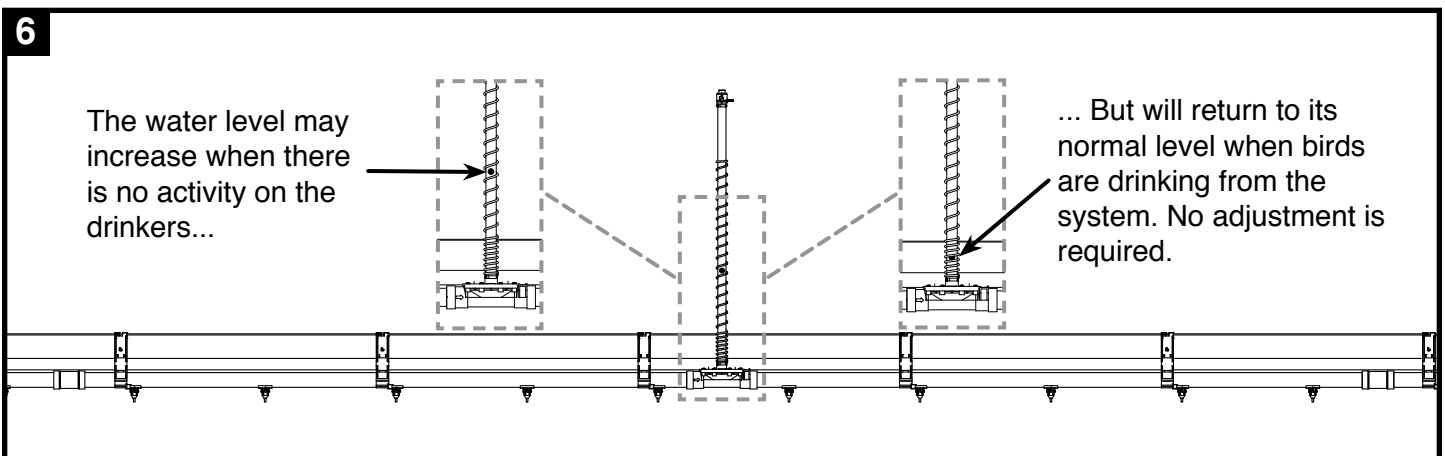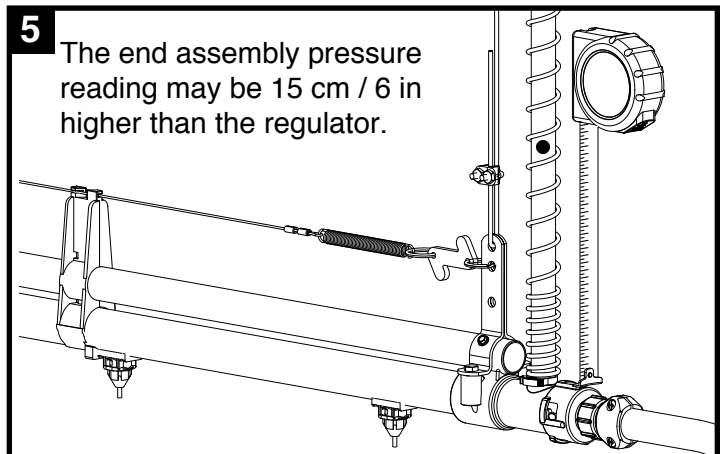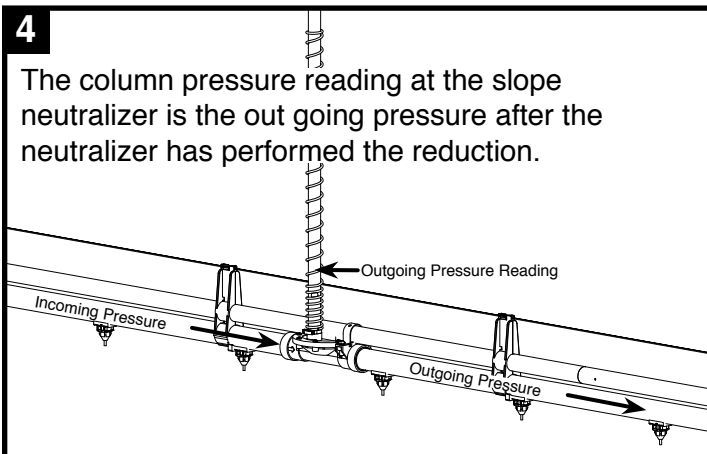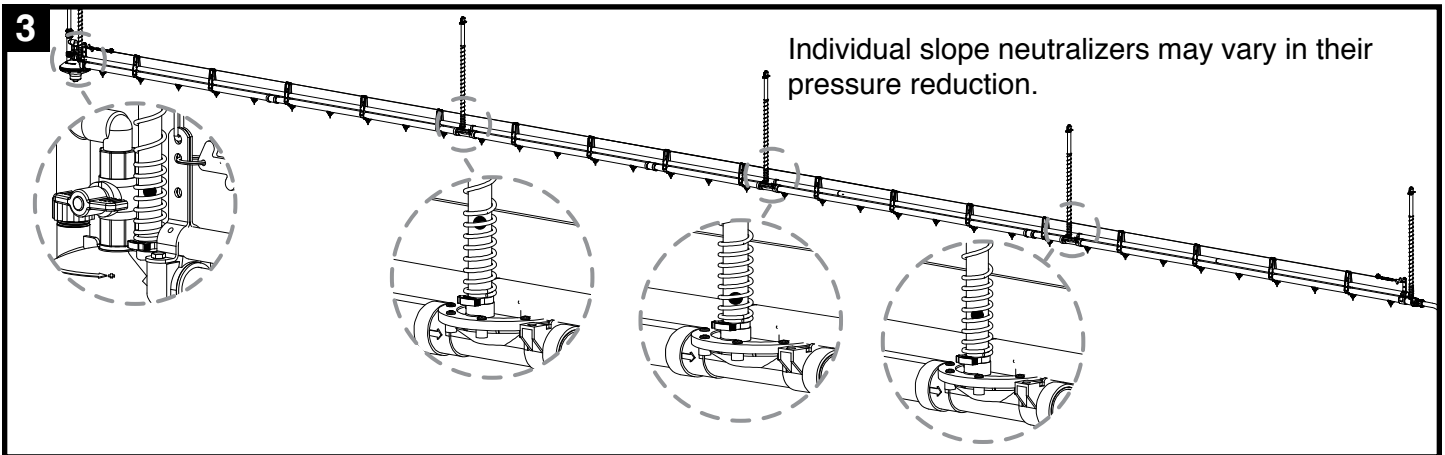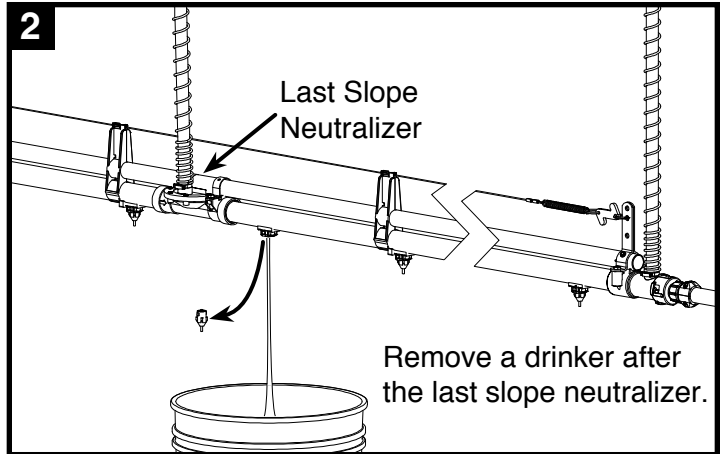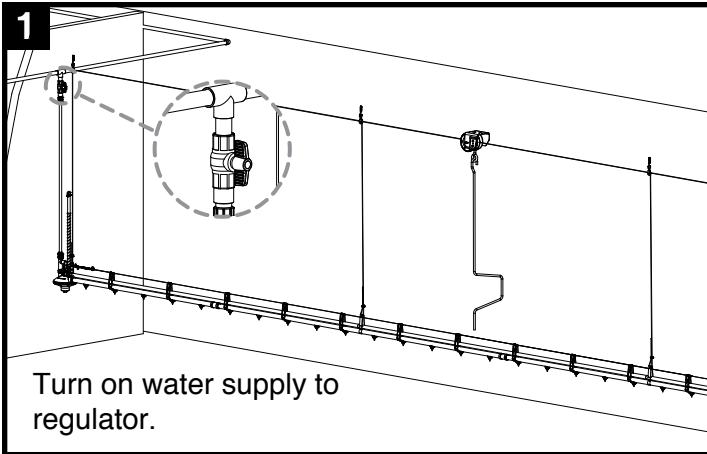

Troubleshooting


TROUBLESHOOT OUT OF RANGE SLOPE NEUTRALIZER

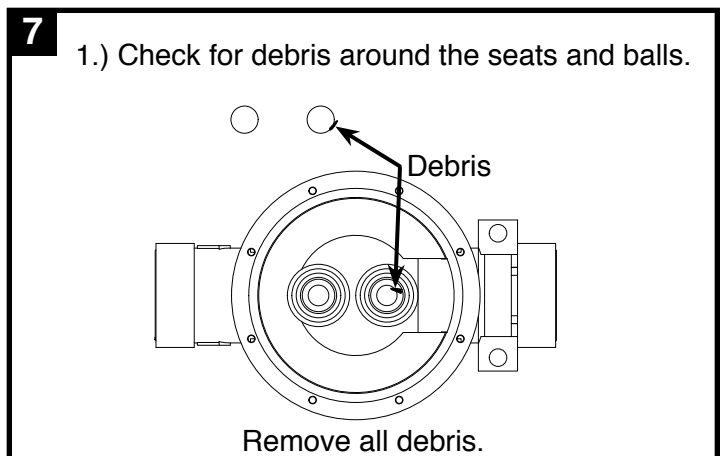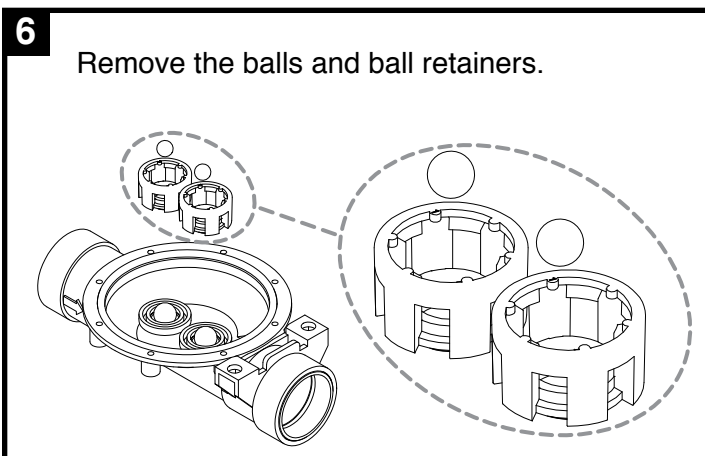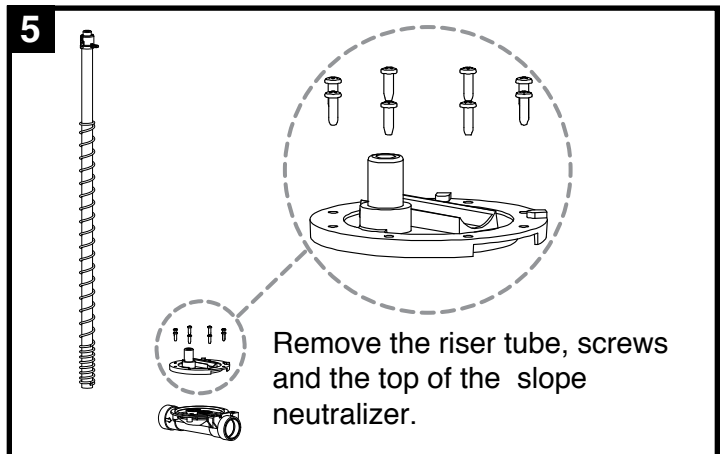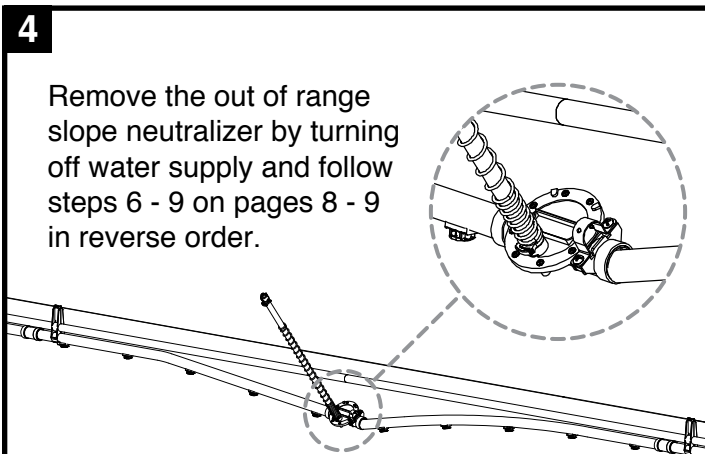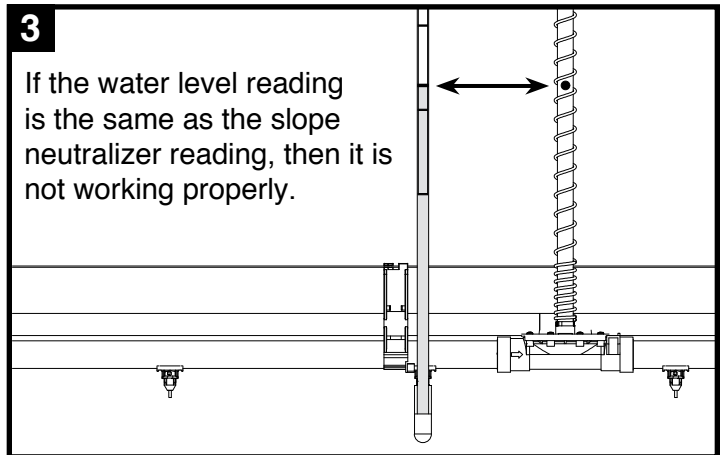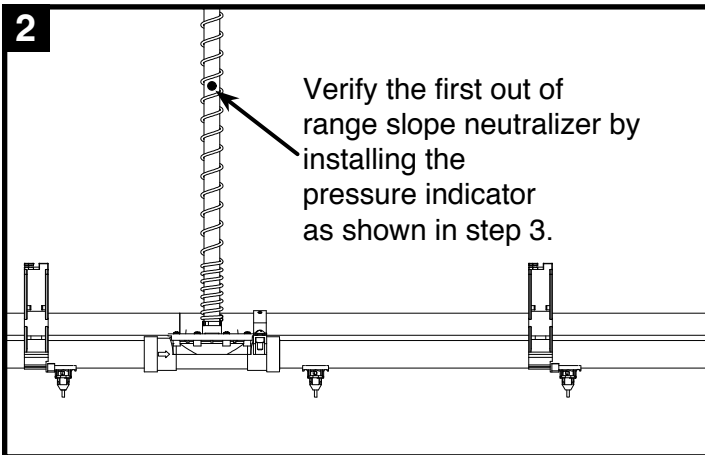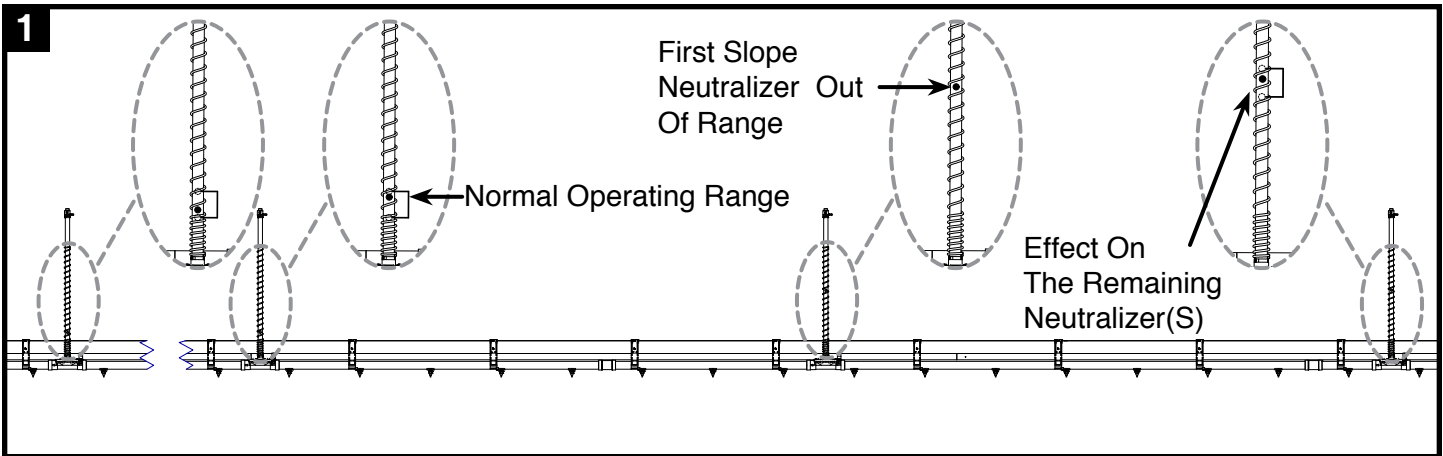

TROUBLESHOOT OUT OF RANGE SLOPE NEUTRALIZER

8

The slope neutralizer is unable to function because the ball is unable to fully seat.

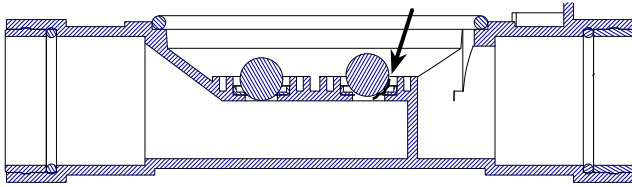



Remove all debris.

9

2.) Check for sticky substances on inner components by doing the following.

With a clean thumb press down on the ball for 5 seconds.

Lift thumb straight up off table.



10


If the ball sticks longer than 1 second, there is a sticky substance present in the system.



Clean the internal components with a hydrogen peroxide based cleaner.


11

Reassemble the slope neutralizer and return to working order.

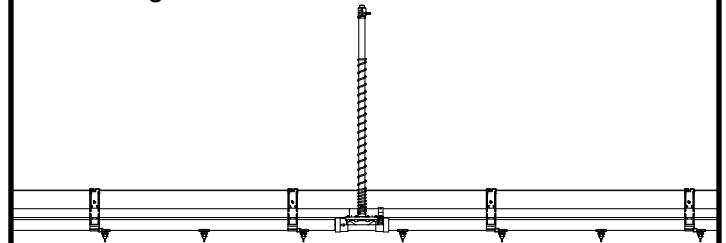


Recommend flushing the system with hydrogen peroxide based cleaner if inner components were sticky.

12

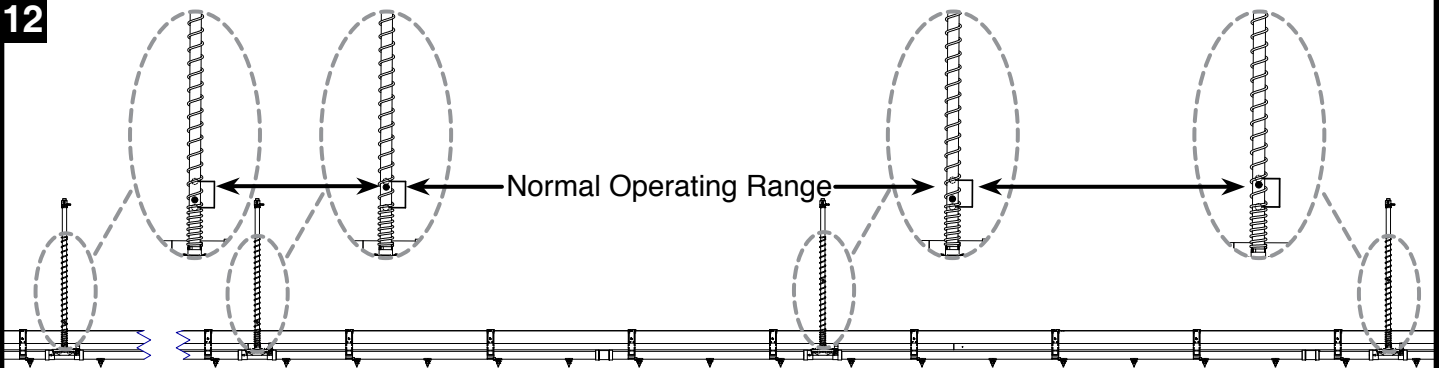

If all slope neutralizers are within normal operating range, no further action is required.

13

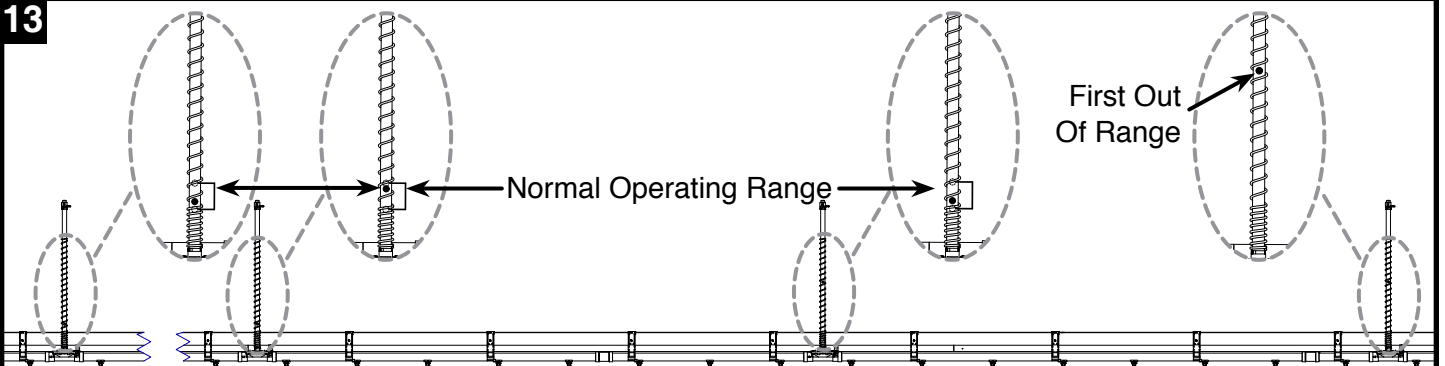

If any slope neutralizers are not within normal operating range, repeat steps 1 - 11 until all slope neutralizers are within the normal operating range.